


### PRODUCT DESCRIPTION

- » Made of special, heat-resistant tool steel
- » With integrated length adjustment screw
- » With threaded holes for subsequent fine balancing
- » Optimal running smoothness due to hard turned shanks
- » With Balluff chip hole

### APPLICATION

- » For clamping tools with cylindrical shank made of carbide or HSS and with h6 shank tolerance
- » Suitable for inductive, contact and hot air shrinking devices

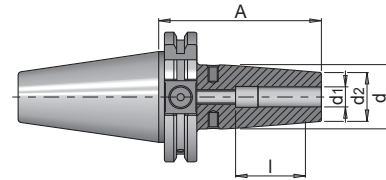

### INCLUDED IN THE DELIVERY

- » Includes built-in length adjustment screw

l	d	d2	Interface	d1	A	No.	EUR
-	17	12	SK 40	3	80	HWZ 2267/SK40/ 3/ 80	<>
-	17	12	SK 40	4	80	HWZ 2267/SK40/ 4/ 80	<>
-	17	12	SK 40	5	80	HWZ 2267/SK40/ 5/ 80	<>
37	27	21	SK 40	6	80	HWZ 2267/SK40/ 6/ 80	<>
37	27	21	SK 40	6	120	HWZ 2267/SK40/ 6/120	<>
37	27	21	SK 40	8	80	HWZ 2267/SK40/ 8/ 80	<>
37	27	21	SK 40	8	120	HWZ 2267/SK40/ 8/120	<>
42	32	24	SK 40	10	80	HWZ 2267/SK40/10/ 80	<>
42	32	24	SK 40	10	120	HWZ 2267/SK40/10/120	<>
48	32	24	SK 40	12	80	HWZ 2267/SK40/12/ 80	<>
48	32	24	SK 40	12	120	HWZ 2267/SK40/12/120	<>
51	34	27	SK 40	16	80	HWZ 2267/SK40/16/ 80	<>
53	42	33	SK 40	20	80	HWZ 2267/SK40/20/ 80	<>
59	53	44	SK 40	25	100	HWZ 2267/SK40/25/100	<>